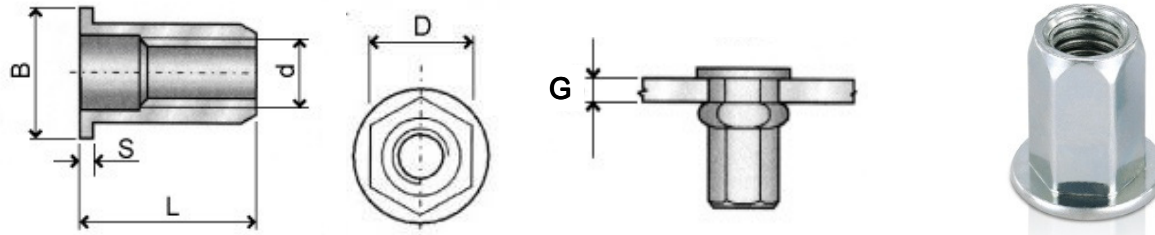


Steel Blind Nuts





Flat Head Large Flange Type Hexagonal Shank


NUT CODE	THREAD SIZE d (mm)	NUT DIAMETER D (mm)	HOLE SIZE (-0/+0.1mm)	NUT LENGTH L (mm)	GRIP RANGE G (mm)	HEAD DIAMETER B (mm)	HEAD THICKNESS S (mm)
M4LF-HEX	M4 x 0.7	5.9	6	11	0.5-2.0	9	1.0
M5LF-HEX	M5 x 0.8	6.9	7	14	0.5-3.0	10	1.0
M6LF-HEX	M6 x 1.0	8.9	9	16	0.5-3.0	13	1.5
M8LF-HEX	M8 x 1.25	10.9	11	18	0.5-3.0	16	1.5
M10LF-HEX	M10 x 1.5	12.9	13	23	0.5-3.5	19	2.0


- Perfect for use in metal, fiberglass and rigid plastic previously too thin for tapped threads
- Provide a neat appearance after installation
- Once in place, the internal threads are ready for a screw or bolt

Easy Steps for Installation

1
Drill hole to correct diameter, thread fastener onto tool mandrel and insert into hole.


2
Actuate tool to properly set fastener into material.


3
Complete your fastening operation with a bolt or screw with the proper thread.


4
The positive riveting action of S.R.C Blind Nuts provide consistent firm fastening. Push-out and shake-loose are virtually eliminated.


Due to continuous development we reserve the right to alter specifications without prior notice.

Factory:

SRC METAL (SHANGHAI) CO., LTD.

SRC METAL (JIASHAN) CO., LTD.

<http://www.srcrivet.com>